


SERVICE BULLETIN

Non-Contact Paste Level Control for Single Size Bag Machines

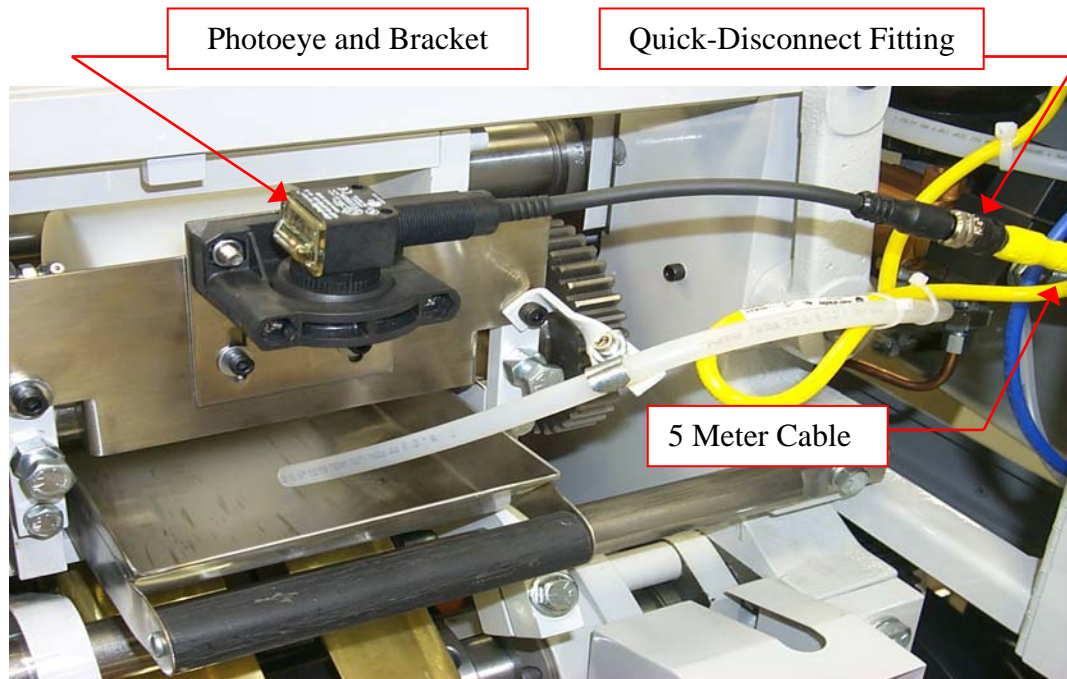

This feature makes glue level measurement simple and easy to maintain on all machinery. The photoelectric eye has a fixed sensing distance of 100mm and comes with adjustment brackets including swivel for angled applications. The photoelectric eye has 3 LED's indicating output, margin, and power status. No adjustment to the photoelectric eye is necessary. Location determines liquid level – it's that simple! The photoelectric eye is extremely rugged and will perform well in spite of bag machine vibration. It is UL listed, CSA Certified, and CE rated. It can be incorporated into both AC and DC control circuits without difficulty.

The photoelectric eye has a quick-disconnect electrical fitting for speedy removal for occasional cleaning. It is NEMA 6P, and IEC IP67 rated, which includes short-term full immersion in water or strong jets of water. The non-contact nature of the sensor and its distance from glue splatter make clean-up far less frequent. The 5meter safety-yellow patchcord cable makes field wiring of the device convenient and safe.

The included brackets utilize the same mounting hole pattern as the probe-style electrode for easy installation and adjustment of the device.

Contact the H.G. Weber Service Department at 920-894-2342

H.G. WEBER & CO., INC.

725 Fremont Street, P.O. Box 196
Kiel, Wisconsin 53042-0196 U.S.A.

Service Phone: 920-894-2342
Service FAX: 920-894-4641

FLEXIBLE PACKAGING MACHINERY

E-mail: bagmachines@hgweber.com
Web Site: www.hgweber.com