




NEW SHIMLESS OPENING CYLINDER

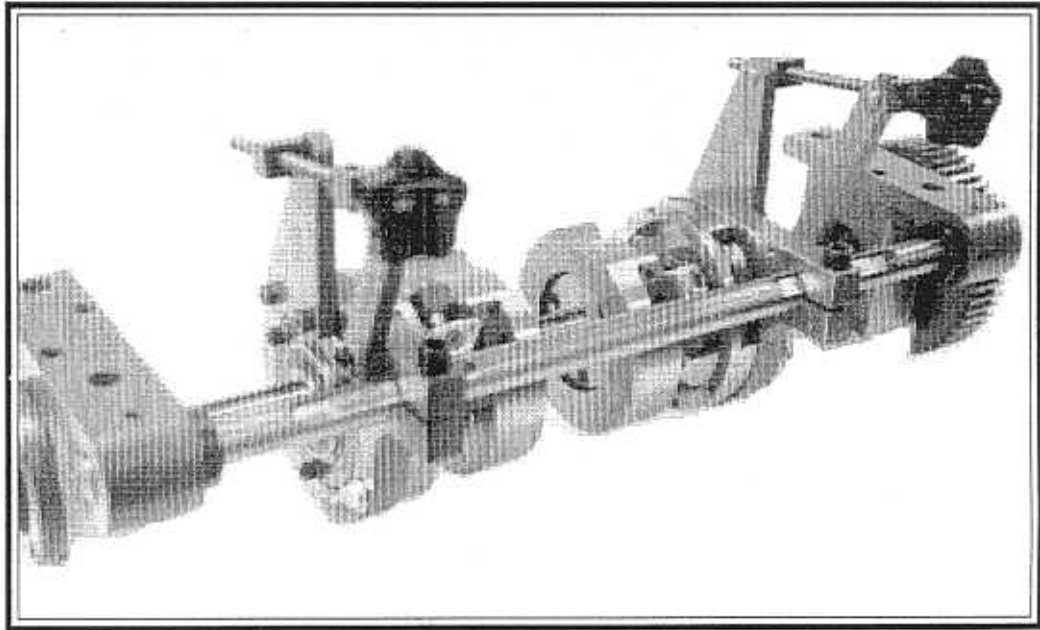

A two-piece cam is used, one part to move the finger off the tube for proper size and stretch, the other cam part allows the spring loaded finger to move into the gusset and grip the tube.

As the pick up and drop off cams are separate, the increasing and decreasing of bottom size or stretch does not effect the pick up timing.

FEATURES:

- New for Weber #5 and #7 adjustable machines.
- Spring on, cam off - continuous cam design.
- No change out cams, no gauge blocks, no set up gauge required.
- Cuts changeover time by giving complete lateral adjustment of each cylinder, with only having one clamp hub bolt to loosen to relocate cylinders laterally.