


Window Die Cutter

- ◆ Ideal for custom window die cutting
- ◆ Rugged design for precise, consistent performance
- ◆ 360° registration adjustment
- ◆ May be placed inline with a wide variety of converting equipment

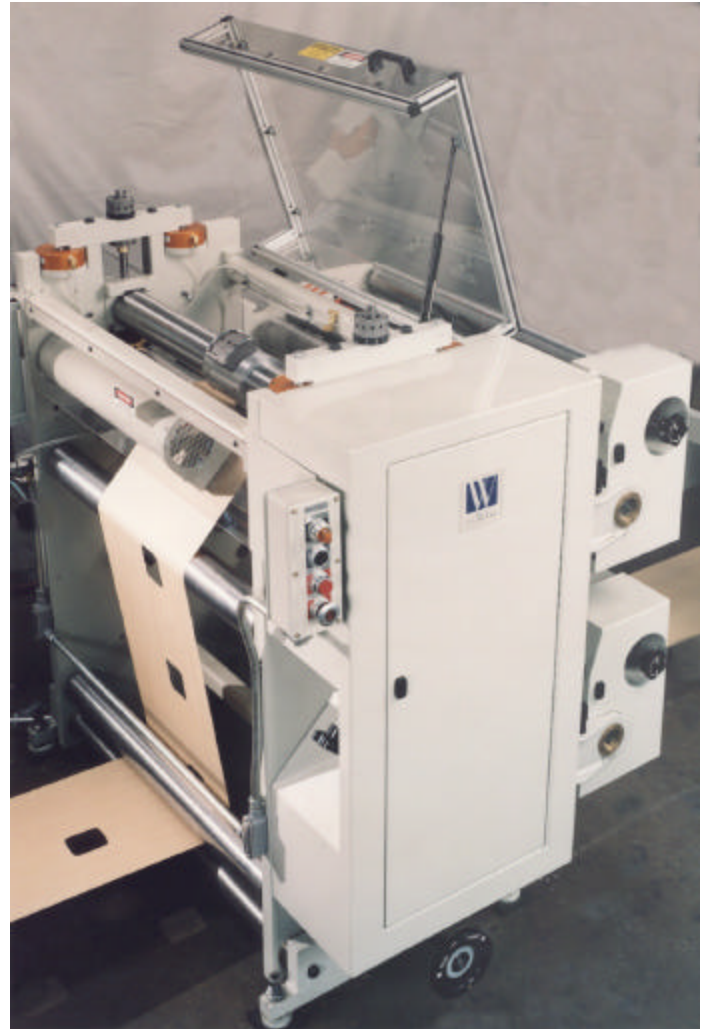

Precision and performance are just two trademarks of H.G. Weber Company's window die cutter. Accuracy, flexibility, and durable construction make the H.G. Weber window die cutter the ideal choice for custom die cutting. The die cutter's modular design makes it easy to incorporate into your new or existing converting machine line, regardless of manufacturer.

A wide range of standard features, including a 360° running registration adjustment simplifies operation.

Broaden your market base by offering your customers decorative die cut bags, die cut handle bags, hole punching, cross web cutting, web perforating and more. Incorporate a laminator and patch applicator to further expand your possibilities for additional products.

Converting your ideas.

STANDARD FEATURES

- ◆ Steel frames for optimum strength
- ◆ Ball bearing mounting of all rotating shafts for smooth operation and long life
- ◆ Positive, “no-creep” adjustment locks to maintain accurate settings
- ◆ Acme thread screws for precise die to anvil adjustment
- ◆ Full width anvil roll
- ◆ 360° running registration adjustment
- ◆ 90° miter gear box for layshaft drive
- ◆ Lateral positioning
- ◆ Bearer roll bridge
- ◆ Full mandrel tooling to cover range
- ◆ Metric or U.S. standard gearing
- ◆ Chip collector
- ◆ Fully guarded

OPTIONAL FEATURES

- ◆ Servo drive
- ◆ Additional dies
- ◆ Siftproof slitting
- ◆ Compensator roll
- ◆ Additional guide rolls
- ◆ Explosion proof motor
- ◆ Waste exhaust system

SPECIFICATIONS

Machine Models		DC3	DC5	DC7	DC8	DC11
Maximum Web Width	Inches	30	40	45	51	65
	mm	762	1016	1143	1295	1651
Repeat Range	10 Pitch 1-Up	Inches	15.707 - 35.814	17.279 - 35.814	17.279 - 35.814	17.279 - 35.814
		mm	400 - 910	440 - 910	440 - 910	440 - 910
	10 Pitch 2-Up	Inches	7.854 - 17.907	8.796 - 17.907	8.796 - 17.907	8.796 - 17.907
		mm	200 - 455	223 - 455	223 - 455	223 - 455
	¼ C.P.: 1-Up	Inches	15.75 - 36	17.5 - 36	17.5 - 36	17.5 - 36
		mm	400 - 914	444 - 914	444 - 914	444 - 914
	¼ C.P.: 2-Up	Inches	8.00 - 18	8.75 - 18	8.75 - 18	8.75 - 18
		mm	203 - 457	222 - 457	222 - 457	222 - 457
Distance Between Frame	Inches	33	43	48	54	68
	mm	838	1092	1219	1371	1727
Die-Cut Shaft Diameter	Inches	3.25	3.75	3.75	3.75	3.75
	mm	82	95	95	95	95

PLEASE NOTE: Certain bag size combinations within a machine range may be difficult to produce. Contact your sales representative to discuss specific bag sizes.

Machine guards are provided for your safety and protection. To avoid the possibility of serious personal injury, all guards **MUST** be in place and functioning properly before machine operation.

H.G. WEBER & CO., INC.

725 Fremont Street, P.O. Bo x 196
Kiel, Wisconsin 53042-0196 U.S.A.

FLEXIBLE PACKAGING MACHINERY

Phone: 920-894-2221
FAX: 920-894-3786

E-mail: bagmachines@hgweber.com
Web Site: www.hgweber.com